

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 December 2000 (07.12.2000)

PCT

(10) International Publication Number
WO 00/73921 A1

(51) International Patent Classification⁷: **G06F 17/00**,
17/27

(21) International Application Number: **PCT/US00/10411**

(22) International Filing Date: **18 April 2000 (18.04.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/323,598 **1 June 1999 (01.06.1999)** **US**

(71) Applicant: **YODLEE.COM, INC.** [US/US]; 595
Lawrence Expressway, Sunnyvale, CA 9408 (US).

(72) Inventors: **INALA, Sumar, Kumar**; 3707 Poincianna
Drive, Apt. 154, Santa Clara, CA 95051 (US). **RANGAN,**

P., Venkat; 13011 Callcott Way, San Diego, CA 92130
(US). **SATYAVOLU, Ramakrishna**; 3707 Poincianna
Drive, Apt. 154, Santa Clara, CA 95051 (US). **RAJAN,**
Sreeranga, Prasannakumar; 3475 Granada Avenue
#320, Santa Clara, CA 95051 (US).


(74) Agent: **BOYS, Donald, R.**; P.O. Box 187, Aromas, CA
95004 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent

[Continued on next page]

(54) Title: **SERVER-SIDE WEB SUMMARY GENERATION AND PRESENTATION**

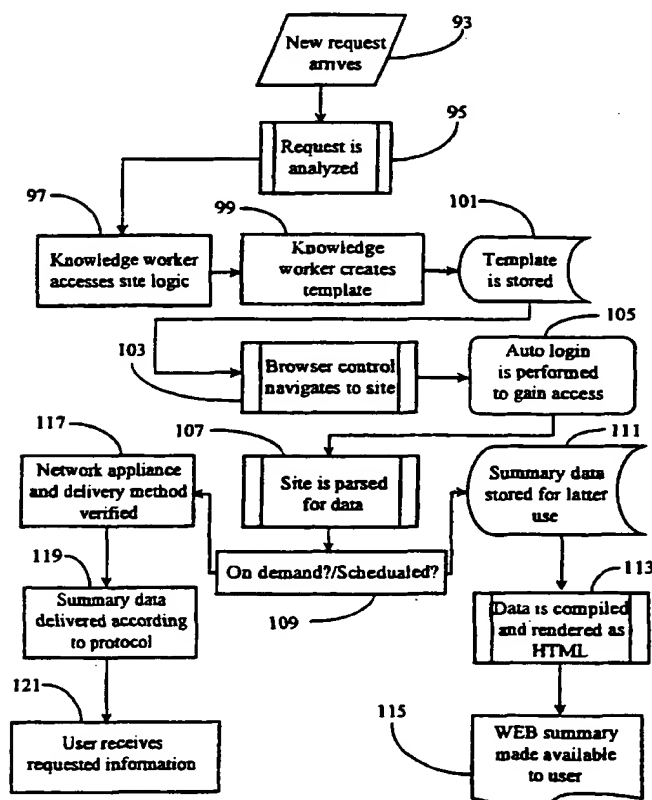

(57) Abstract: A portal server includes a software agent configured to do summary searches for subscribers based on Internet destinations provided by the subscribers, to retrieve information from such destinations based on pre-programmed site information (107), and to download the summary information to the subscriber (119, 115). The destinations and the nature of the information to be retrieved is pre-programmed. There is further a configuration and initiation interface for a subscriber to set up and start a summary search. In some cases the summary searches are configured for individual clients as templates stored (101) and retrieved at the Internet-connected server. Also in some cases (109) retrieved information is immediately sent to the subscriber, and in other situations such information is saved at the portal to be retrieved by a subscriber at a later time (111). In preferred embodiments of the invention autologins are accomplished (105) for a subscriber at Internet destinations by use of pre-stored configuration information.



(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— With international search report.

SERVER-SIDE WEB SUMMARY GENERATION AND PRESENTATION

5

Field of the Invention

The present invention is in the field of Internet navigation including various
10 communication means and connection technologies and pertains more particularly to
methods and apparatus, including software, for gathering summary information from users
or enterprise-selected WEB sites and presenting the information as HTML to the user
using either a push or pull technology.

15

Cross-Reference to Related Documents

The present invention is a continuation in part (CIP) to patent application S/N
09/208,740 entitled "*Method and Apparatus for Providing and Maintaining a User-*
20 *Interactive Portal System Accessible via Internet or other Switched-Packet-Network*"
filed on 12/08/98, disclosure of which is incorporated herein in its entirety herein by
reference.

25

Background of the Invention

The information network known as the World Wide Web (WWW), which is a
subset of the well-known Internet, is arguably the most complete source of publicly
accessible information available. Anyone with a suitable Internet appliance such as a

- 2 -

personal computer with a standard Internet connection may access (go on-line) and navigate to information pages (termed web pages) stored on Internet-connected servers for the purpose of garnering information and initiating transactions with hosts of such servers and pages.

5 Many companies offer various subscription services accessible via the Internet. For example, many people now do their banking, stock trading, shopping, and so forth from the comfort of their own homes via Internet access. Typically, a user, through subscription, has access to personalized and secure WEB pages for such functions. By typing in a user name and a password or other personal identification code, a user may
10 obtain information, initiate transactions, buy stock, and accomplish a myriad of other tasks.

One problem that is encountered by an individual who has several or many such subscriptions to Internet-brokered services is that there are invariably many passwords and/or log-in codes to be used. Often a same password or code cannot be used for every
15 service, as the password or code may already be taken by another user. A user may not wish to supply a code unique to the user such as perhaps a social security number because of security issues, including quality of security, that may vary from service to service. Additionally, many users at their own volition may choose different passwords for different sites so as to have increased security, which in fact also increases the number of
20 passwords a user may have.

Another issue that can plague a user who has many passworded subscriptions is the fact that they must bookmark many WEB pages in a computer cache so that they may quickly find and access the various services. For example, in order to reserve and pay for airline travel, a user must connect to the Internet, go to his/her book-marks file and select
25 an airline page. The user then has to enter a user name and password, and follow on-screen instructions once the page is delivered. If the user wishes to purchase tickets from the WEB site, and wishes to transfer funds from an on-line banking service, the user must also look for and select the personal bank or account page to initiate a funds transfer for

- 3 -

the tickets. Different user names and passwords may be required to access these other pages, and things get quite complicated.

Although this preceding example is merely exemplary, it is generally known that much work related to finding WEB pages, logging in with passwords, and the like is
5 required to successfully do business on the WEB.

A service known to the inventor and described in the related case listed under the cross-reference to related documents section provides a WEB service that allows a user to store all of his password protected pages in one location such that browsing and garnering information from them is much simplified. A feature of the above service allows a user to
10 program certain tasks into the system such that requested tasks are executed by an agent (software) based on user instruction. The service stores user password and log-in information and uses the information to log-in to the user's sites, thus enabling the user to navigate without having to manually input log-in or password codes to gain access to the links.

15 The above-described service uses a server to present a user-personalized application that may be displayed as an interactive home page that contains all of his listed sites (hyperlinks) for easy navigation. The application lists the user's URL's in the form of hyperlinks such that a user may click on a hyperlink and navigate to the page wherein login, if required, is automatic, and transparent to the user.

20 The application described above also includes a software agent that may be programmed to perform scheduled tasks for the user including returning specific summaries and updates about user-account pages. A search function is provided and adapted to cooperate with the software agent to search user-entered URL's for specific content if such pages are cached somewhere in their presentable form such as at the portal
25 server, or on the client's machine.

In addition to the features described above, it is desirable that the software agent in conjunction with the search function be enabled to navigate to any URL or group of URL's, provided as input by a user or otherwise deemed appropriate by the service

- 4 -

provider, for the purpose of providing summary information regarding updated content for each URL, which may be presented as an HTML information-page to the user.

What is clearly needed is a method and apparatus that can independently navigate to user-supplied or known URL's, login with the appropriate password information at
5 each URL (if required), and return requested summary information to a user in the form of a human and machine-readable HTML document. Such a system would provide an effective summarization service wherein important information may be presented to a user without requiring that the user invoke hyperlinks at his personal portal home page.

10

Summary of the Invention

In a preferred embodiment of the present invention an Internet Portal is provided, comprising an Internet-connected server; and a portal software executing on the server,
15 including a summary software agent. The Portal maintains a list of Internet destinations specific for a subscriber, and the summary software agent accesses the Internet destinations, retrieves information according to pre-programmed criteria, and summarizes the retrieved information for delivery to the subscriber.

20 In one embodiment the Portal further comprises a configuration and initiation interface for a subscriber to set up and start a summary search, and summary searches may be configured for individual clients as templates stored and retrieved at the Internet-connected server. In some cases summary information is stored to be later downloaded at request of the subscriber, and in others the information is immediately pushed to the client.
25 Also in some embodiments autologins are performed for the subscriber at each Internet site according to a data stored for the subscriber at the Portal.

Methods for practicing the invention in several embodiments are provided as well in the descriptions that follow, and for the first time a system is enabled allowing

- 5 -

subscribers to quickly access multiple WEB sites without lengthy log-in procedures, and to also summarize and download the data resulting from a summary search.

5

Brief Description of the Drawing Figures

Fig. 1 is an overview of an Internet portal system and network according to an embodiment of the present invention.

Fig. 2 is an exemplary plan view of a personalized Portal home page application as it may be seen on a display monitor according to an embodiment of the present invention.

Fig. 3 is a flow diagram illustrating user interaction with the Internet portal of fig. 1.

Fig. 4 is a block diagram illustrating a summarization software agent and capabilities thereof according to an embodiment of the present invention.

Fig. 5 is a logical flow chart illustrating an exemplary summarization process performed by the software agent of Fig. 4 operating in a user-defined mode.

Fig. 6 is a logical flow chart illustrating an exemplary summarization process performed by the software agent of Fig. 4 in a User-independent smart mode with minimum user input.

20

Description of the Preferred Embodiments

25

According to a preferred embodiment of the present invention, a unique Internet portal is provided and adapted to provide unique services to users who have obtained access via an Internet or other network connection from an Internet-capable appliance. Such an interface provides users with a method for storing many personal WEB pages and

- 6 -

further provides search function and certain task-performing functions. The methods and apparatus of the present invention are taught in enabling detail below.

Fig. 1 is an overview of an Internet portal system 11 and Internet network 13 according to an embodiment of the present invention. Portal system 11, in this embodiment, operates as an ISP in addition to a unique network portal, but may, in other embodiments be implemented as a stand-alone Internet server. In yet other embodiments the service and apparatus described herein may also be provided by such as a search and listing service (AltaVista™, Yahoo™) or by any other enterprise hosting a WEB-connected server.

Internet 13 is representative of a preferred use of the present invention, but should not be considered limiting, as the invention could apply in other networks and combinations of networks.

ISP 15 in this embodiment comprises a server 31, a modem bank 33, represented here by a single modem, and a mass storage repository 29 for storing digital data. The modem bank is a convenience, as connection to the server could be by another type of network link. ISP 15, as is typical in the art, provides Internet access services for individual subscribers. In addition to well-known Internet access services, ISP 15 also provides a unique subscription service as an Internet portal for the purpose of storing many WEB pages or destinations along with any passwords and or personal codes associated with those pages, in a manner described in more detail below. This unique portal service is provided by execution of Portal Software 35, which is termed by the inventors the Password-All suite. The software of the invention is referred to herein both as the Portal Software, and as the Password-all software suite. Also, in much of the description below, the apparatus of the invention is referred to by the Password-All terminology, such as *the Password-All Server or Password-All Portal*.

ISP 15 is connected to Internet 13 as shown. Other equipment known in the art to be present and connected to a network such as Internet 13, for example, IP data routers, data switches, gateway routers, and the like, are not illustrated here but may be assumed

- 7 -

to be present. Access to ISP 15 is through a connection-oriented telephone system as is known in the art, or through any other Internet/WEB access connection, such as through a cable modem, special network connection (e.g. T1), ISDN, and so forth. Such connection is illustrated via access line 19 from Internet appliance 17 through modem bank 33.

5 In a preferred embodiment a user has access to Internet Password-All Portal services by a user name and password as is well known in the art, which provides an individualized WEB page to the subscriber. In another embodiment wherein a user has other individuals that use his or her Internet account, then an additional password or code unique to the user may be required before access to portal 31 is granted. Such
10 personalized Portal WEB pages may be stored in repository 29, which may be any convenient form of mass storage.

Three Internet servers 23, 25, and 27, are shown in Internet 13, and represent Internet servers hosted by various enterprises and subscribed to by a user operating appliance 17. For example, server 23 may be a bank server wherein interactive on-line
15 banking and account managing may be performed. Server 25 may be an investment server wherein investment accounts may be created and managed. Server 27 may be an airline or travel server wherein flights may be booked, tickets may be purchased, and so on. In this example, all three servers are secure servers requiring user ID and password for access, but the invention is not necessarily limited to just secure services.

20 In a preferred embodiment of the present invention, a subscribing user operating an Internet-capable appliance, such as appliance 17, connects to Password-All Portal system 11 hosted by ISP 15, and thereby gains access to a personalized, interactive WEB page, which in turn provides access to any one of a number of servers on Internet 13 such as servers 23, 25, and 27, without being required to enter additional passwords or codes. In
25 a preferred embodiment the software that enables this service is termed Password-All by the inventors. Password-All may be considered to be a software suite executing on the unique server, and in some instances also on the user's station (client). Additional interactivity provided by portal software 35 allows a connected user to search his listed

- 8 -

pages for information associated with keywords, text strings, or the like, and allows a user to program user-defined tasks involving access and interaction with one or more Internet-connected servers such as servers 23, 25, and 27 according to a pre-defined time schedule. These functions are taught in enabling detail below.

5 Fig. 2 is an illustration of a personalized portal page as may be seen on a display monitor according to an embodiment of the present invention, provided by Password-All Portal software 35 executing on server 31, in response to secure access by a subscriber. Page 32 presents an interactive listing 34 of user-subscribed or member WEB pages, identified in this example by URL, but which may also be identified by any convenient
10 pseudonym, preferably descriptive, along with user name and typically encrypted password information for each page. Listed in a first column under *destination*, are exemplary destinations LBC.com, My Bank.com, My Stocks.com, My shopping.com, Mortgage.com, and Airline.com. These are but a few of many exemplary destinations that may be present and listed as such on page 33. In order to view additional listings listed
15 but not immediately viewable from within application 33, a scroll bar 35 is provided and adapted to allow a user to scroll up or down the list to enable viewing as is known in the art.

Items listed in list 34 in this example may be considered destinations on such as servers 23, 25, and 27 of Fig. 1. Typically the URL associated with an item on this list
20 will not take a user to a server, per se, but to a page stored on a server. User names and password data associated with each item in list 34 are illustrated in respective columns labeled *user name*, and *password*, to the right of the column labeled *destination*. Each listing, or at least a portion of each listing, is a hyperlink invoking, when selected, the URL to that destination. In some instances a particular service may have more than one
25 associated URL. For example, My Bank.com may have more than one URL associated for such as different accounts or businesses associated also with a single subscriber. In this case there may be a sub-listing for different destinations associated with a single higher-

- 9 -

level listing. This expedient is not shown, but given this teaching the mechanism will be apparent to those with skill in the art.

In some embodiments one page 33 may be shared by more than one user, such as a husband and wife sharing a common account and subscription. An instance of this is
5 illustrated herein with respect to the server labeled Mortgage.com wherein both a John and a Jane Doe are listed together under the column labeled user name. In another embodiment, a network of individuals, perhaps business owners, authorized co-workers, investment parties, or the like may share one application. In this way, system 11 may be adapted for private individuals as well as business uses.

10 After gaining access to application 33 which is served via Internet portal server 31 of Fig. 1, a user may scroll, highlight, and select any URL in his or her list 34 for the purpose of navigation to that particular destination for further interaction. Application 33 already has each password and user name listed for each URL. It is not necessary, however, that the password and user name be displayed for a user or users. These may
15 well be stored transparently in a user's profile, and invoked as needed as a user makes selections. Therefore, a user is spared the need of entering passwords and user names for any destinations enabled by list 34. Of course, each list 34 is built, configured and maintained by a subscribing user or users, and an editing facility is also provided wherein a user may edit and update listings, including changing URL's adding and deleting listings,
20 and the like.

In another aspect of the invention new listings for a user's profile, such as a new passthrough to a bank or other enterprise page, may be added semi-automatically as follows: Typically, when a user opens a new account with an enterprise through
interaction with a WEB page hosted by the enterprise, the user is required to provide
25 certain information, which will typically include such as the user's ID, address, e-mail account, and so forth, and typically a new user name and password to access the account. In this process the user will be interacting with the enterprise's page from his/her browser. A Password-All plug-in is provided wherein, after entering the required information for

- 10 -

the new enterprise, the user may activate a pre-determined signal (right click, key stroke, etc.), and the Password-All suite will then enter a new passthrough in the user's Password-All profile at the Password-All Portal server.

In a related method for new entries, the enterprise hosting the Password-All Portal may, by agreement with other enterprises, provide log-in and sign-up services at the Password-All Portal, with most action transparent to the user. For example, there may be, at the Password-All Portal, a selectable browser list of cooperating enterprises, such as banks, security services, and the like, and a user having a Password-All Portal subscription and profile may select among such cooperating enterprises and open new accounts, which will simultaneously and automatically be added to the Password-All Portal page for the user and to the server hosted by the cooperating enterprise. There may be some interactivity required for different accounts, but in the main, much information from the user's profile may be used directly without being re-entered.

The inventors have anticipated that many potential users may well be suspicious of providing passwords and user names to an enterprise hosting a Password-All Portal Server executing a service like Password-All according to embodiments of the present invention. To accommodate this problem, in preferred embodiments, it is not necessary that the user provide the cleartext password to Password-All. Instead, an encrypted version of each password is provided. When a user links to his passthrough page in Password-All at the Password-All Portal server, when he/she invokes a hyperlink, the encrypted password is returned to the user's system, which then, by virtue of the kept encryption key or master password, invokes the true and necessary password for connection to the selected destination. It is thus not necessary that cleartext passwords be stored at the Password-All Portal server, where they may be vulnerable to attack from outside sources, or to perceived misuse in other ways as well.

In a related safety measure, in a preferred embodiment of the invention, a user's complete profile is never stored on a single server, but is distributed over two or more,

- 11 -

preferably more, servers, so any problem with any one server will minimize the overall effect for any particular user.

5 Password-All, as described above, allows a user to access a complete list of the user's usual cyberspace destinations, complete with necessary log-on data, stored in an encrypted fashion, so a user may simply select a destination (a hyperlink) in the Password-All list, and the user's browser then invokes the URL for the selected destination. In an added feature, Password-All may display banner ads and other types of advertisement during the navigation time between a hyperlink being invoked and the time the destination WEB page is displayed.

10 In yet another embodiment of the invention, a user/subscriber need not access the Password-All page to enjoy the advantages of the unique features provided. In this variation, a Plug-In is provided for the subscriber's WEB browser. If the subscriber navigates by use of the local browser to a WEB page requiring a secure log-in, such as his/her on-line banking destination, when the subscriber is presented with an input window
15 for ID and Password, the plug in may be activated by a predetermined user input, such as a hot key or right click of the mouse device. The plug-in then accesses, transparently, the Password-All page (which may be cached at the client), and automatically accesses and provides the needed data for log-on.

In yet another aspect of the invention a search option 37 allows a user to search
20 list 34 for specific URL's based on typed input such as keywords or the like. In some cases, the number of URL's stored in list 34 can be extensive making a search function such as function 37 an attractive option. A criteria dialog box 51 illustrated as logically separated from and below list 34 is provided and adapted to accept input for search option 37 as is known in the art. In one embodiment, search option 37 may bring up a second
25 window wherein a dialog box such as box 51 could be located.

In another aspect of the invention the search function may also be configured in a window invoked from window 33, and caused to search all or selected ones of listed destinations, and to return results in a manner that may be, at least to some extent,

- 12 -

configured by a user. For example, a dialog box may be presented wherein a user may enter a search criteria, and select among all of the listed destinations. The search will then be access each of the selected destinations in turn, and the result may be presented to the user as each instance of the criteria is found, or results may be listed in a manner to be
5 accessed after the search.

Preferably the search function is a part of the Password-All Portal software, available for all users, and may be accessed by hyperlinks in user's personal pages. In some embodiments users may create highly individualized search functions that may be stored in a manner to be usable only by the user who creates such a function.

10 In many aspects of the present invention, knowledge of specific WEB pages, and certain types of WEB pages, is highly desirable. In many embodiments characteristics of destination WEB pages are researched by persons (facilitators) maintaining and enhancing Password-All Portal software 35, and many characteristics may be provided in configuration modules for users to accomplish specific tasks. In most cases these
15 characteristics are invoked and incorporated transparent to the user.

In yet another aspect of the present invention, the Password-All suite is structured to provide periodic reports to a user, in a manner to be structured and timed by the user, through the user's profile. For example, reports of changes in account balances in bank accounts, stock purchases, stock values, total airline travel purchases, frequent-flier miles,
20 and the like may be summarized and provided to the users in many different ways.

Because the Password-All Portal server with the Password-All software site handles a broad variety of transactional traffic for a user, there is an opportunity to summarize and collect and process statistics in many useful ways. In preferred embodiments of the invention such reports may be furnished and implemented in a number of different ways,
25 including being displayed on the user's secure personal WEB page on the Password-All Portal.

In addition to the ability of performing tasks as described above, task results including reports, and hard documents such as airline tickets may be sent over the Internet

- 13 -

or other data packet-networks to user-defined destinations such as fax machines, connected computer nodes, e-mail servers, and other Internet-connected appliances. All tasks may be set-up and caused to run according to user-defined schedules while the user is doing something else or is otherwise not engaged with the scheduled task.

5 In another embodiment of the present invention, recognizing the increasing use of the Internet for fiscal transactions, such as purchasing goods and services, a facility is provided in a user's profile to automatically track transactions made at various destinations, and to authorize payment either on a transaction-by-transaction basis, or after a session, using access to the user's bank accounts, all of which may be pre-programmed
10 and authorized by the user.

Other functions or options illustrated as part of application 35 include a last URL option 41, an update function 43, and an add function 45. Function 41 allows a user to immediately navigate to a last visited URL. Update function 43 provides a means of updating URL's for content and new address. An add function enables a user to add
15 additional URL's to list 34. Similarly, function 45 may also provide a means to delete entries. Other ways to add accounts are described above. It should be noted that the services provided by the unique Password-All Portal in embodiments of the present invention, and by the Password-All software suite are not limited to destinations requiring passwords and user names. The Password-All Portal and software in many embodiments
20 may also be used to manage all of a user's bookmarks, including editing of bookmarks and the like. In this aspect, bookmarks will typically be presented in indexed, grouped, and hierarchical ways.

There are editing features provided with Password-All for adding, acquiring, deleting, and otherwise managing bookmarks. As a convenience, in many embodiments of
25 the invention, bookmarks may be downloaded from a user's Password-All site, and loaded onto the same user's local browser. In this manner, additions and improvements in the bookmark set for a user may be used without the necessity of going to Password-All.

- 14 -

Further, bookmarks may be uploaded from a user's local PC to his/her home page on the Password-All site by use of one or more Password-All plug-ins.

It will be apparent to the skilled artisan, given the teaching herein, that the functionality provided in various embodiments of the invention is especially applicable to Internet-capable appliances that may be limited in input capability. For example, a set-top box in a WEB TV application may well be without a keyboard for entering IDs and Passwords and the like. In practice of the present invention keyboard entry is minimized or eliminated. The same comments apply to many other sorts of Internet appliances.

In preferred embodiments of the invention, once a subscriber-user is in Password-All, only an ability to point-and-click is needed for all navigation. To get into the Password-All site, using a limited apparatus, such as an appliance without a keyboard or keypad, a Smartcard or embedded password may be used, or some other type of authentication.

It will be apparent to one with skill in the art that an interactive application such as application 33 may be provided in a form other than a WEB page without departing from the spirit and scope of the present invention. For example, an application such as application 33 may be provided as a downloadable module or program that may be set-up and configured off-line and made operational when on-line.

Fig. 3 is a flow diagram illustrating user interaction with the Internet Password-All Portal of fig. 1. The following process steps illustrated, according to an embodiment of the present invention, are intended to illustrate exemplary user-steps and automated software processes that may be initiated and invoked during interaction with an Internet portal of the present invention such as portal 31 of Fig. 1. In step 53 a user connects to the Internet or another previously described switched-packet network via a compatible appliance such as Internet appliance 17 of Fig. 1.

At step 55, a user enters a user-name and password, which, in one embodiment, may simply be his ISP user name and password. In another embodiment, a second password or code would be required to access an Internet portal such as portal server 31

- 15 -

of Fig. 1 after logging onto the Internet through the ISP. In some cases, having a special arrangement with the ISP, there may be one password for both Internet access through the ISP and for Password-All. At step 57 a personal WEB page such as page 32 of Fig. 2 is displayed via Internet portal server 31. At minimum, the personalized WEB page will
5 contain all user configured URL's, and may also be enhanced by a search function, among other possibilities.

In step 58 a user will, minimally, select a URL from his or her bookmarked destinations, and as is known by hyperlink technology, the transparent URL will be invoked, and the user will navigate to that destination for the purpose of normal user
10 interaction. In this action, the Password-All Portal software transparently logs the user on to the destination page, if such log-on is needed.

At step 60 the user invokes a search engine by clicking on an option such as described option 37 of Fig. 2. At step 62, the user inputs search parameters into a provided text field such as text field 51 of Fig. 2. After inputting such parameters, the
15 user starts the search by a button such as button 52. The search engine extracts information in step 64. Such information may be, in one option, of the form of URL's fitting the description provided by search parameters. A searched list of URL's may be presented in a separate generated page in step 66 after which a user may select which URL to navigate to. In an optional search function, the user may provide search criteria,
20 and search any or all of the possible destinations for the criteria.

In another embodiment wherein WEB pages are cached in their presentable form, information extracted in step 64 may include any information contained in any of the stored pages such as text, pictures, interactive content, or the like. In this case, one displayed result page may provide generated links to search results that include the URL
25 associated with the results. Perhaps by clicking on a text or graphic result, the associated WEB page will be displayed for the user with the result highlighted and in view with regards to the display window.

- 16 -

Enhanced Agent for WEB Summaries

In another aspect of the present invention, a software agent, termed a gatherer by the inventors, is adapted to gather and return summary information about URL's according to user request or enterprise discretion. This is accomplished in embodiments of the present invention by a unique scripting and language parsing method provided by the inventor wherein human knowledge workers associated with the service provide written scripts to such a gatherer according to subscriber or enterprise directives. Such a software gatherer, and capabilities thereof, is described in enabling detail below.

Referring now to Fig. 1, there is illustrated an exemplary architecture representing a portal service-network which, in this case is hosted by ISP 15. Portal software 35 in this embodiment executes on portal server 31 set-up at the ISP location. Mass repository 29 is used for storing subscriber information such as passwords, login names, and the like. Internet servers 23, 25, and 27 represent servers that are adapted to serve WEB pages of enterprises patronized by a subscriber to the portal service such as one operating Internet appliance 17.

The main purpose of portal software 35 as described above with reference to Fig. 2, is to provide an interactive application that lists all of the subscriber's WEB sites in the form of hyperlinks. When a user invokes a hyperlink from his personal list, software 35 uses the subscriber's personal information to provide an automatic and transparent login function for the subscriber while jumping the subscriber to the subject destination.

Referring again to Fig. 2, an interactive list 34 containing user-entered hyperlinks and a set of interactive tools is displayed to a subscriber by portal software 35 of Fig. 1. One of the tools available to a subscriber interacting with list 34 is agent (software) 39. Agent 39 may be programmed to perform certain tasks such as obtaining account information, executing simple transactions, returning user-requested notification information about upcoming events, and so on. Search function 37 and update function 43 may be integrated with agent 39 as required to aid in functionality.

- 17 -

It is described in the above disclosure that agent 39 may, in some embodiments, search for and return certain summary information contained on user-subscribed WEB pages, such as account summaries, order tracking information and certain other information according to user-defined parameters. This feature may be programmed by a user to work on a periodic time schedule, or on demand.

In the following disclosure, enhancements are provided to agent 39. Such enhancements, described in detail below, may be integrated into agent 39 of portal software 35 (Fig.'s 1 and 2); and may be provided as a separate agent or gatherer to run with portal software 35; or may, in some embodiments, be provided as a standalone service that is separate from portal software 35.

Fig. 4 is a block diagram illustrating a summarization software agent 67 and various capabilities and layers thereof according to an embodiment of the present invention. Summarization agent 67, hereinafter termed gatherer 67, is a programmable and interactive software application adapted to run on a network server. Gatherer 67 may, in one embodiment, be integrated with portal software 35 of Fig. 1 and be provided in the form of a software module separate from agent 39 (Fig. 2). In another embodiment, gatherer 67 may be a part of agent 39 as an enhancement to the function of that agent as previously described. In still another embodiment, gatherer 67 may be provided as a parent or client-side application controlled by a separate service from the portal service described above.

In this exemplary embodiment gatherer 67 is a multi-featured software application having a variety of sub-modules and interface modules incorporated therein to provide enhanced function. Gatherer 67 has a client/service interface layer 69 adapted to enable directive input from both a client (user) and a knowledge worker or workers associated with the service. A browser interface 77 is provided in layer 69, and adapted to provide access to application 67 from a browser running on a client's PC or other Internet or network appliance. Interface 77 facilitates bi-directional communication with a user's browser application (not shown) for the purpose of allowing the user to input summary

- 18 -

requests into gatherer 67 and receive summary results. Interface 77 supports all existing network communication protocols such as may be known in the art, and may be adapted to support future protocols.

Layer 69 also comprises a unique input scripting module 79 that is adapted to
5 allow a human knowledge worker to create and supply directive scripts containing the site logic needed by gatherer 67 to find and retrieve data from a WEB site. In this case, gatherer 67 executes and runs on a network server such as server 31 of Fig. 1. However, this is not required in order to practice the present invention.

It is assumed in this example that gatherer 67 is part of the portal software suite 35
10 running on server 31 of Fig. 1. Gatherer 67 may be provided as several dedicated agents, or as one multi-functional agent without departing from the spirit and scope of the present invention. For example, one gatherer 67 may be scripted and programmed to execute a single user request with additional gatherers 67 called upon to perform additional user-requests. Alternatively, one gatherer 67 may be dedicated and assigned to each individual
15 user and adapted to handle all requests from that user.

Interface layer 69 facilitates exchange of information from both a client and a knowledge worker. A client operating a WEB browser with an appropriate plug-in is enabled to communicate and interact with gatherer 67. For example, a user may enter a request to return a summary of pricing for all apartments renting for under \$1000.00 per
20 month located in a given area (defined by the user) from apartments.com (one of user's registered WEB sites). The just mentioned request would be categorized as either a periodic request, or a one time (on demand) request. The communicated request initiates a service action wherein a knowledge worker associated with the service uses module 79 to set-up gatherer 67 to perform it's function. Module 79 is typically executed from a
25 network-connected PC operated by the knowledge worker.

According to an embodiment of the present invention, a unique scripting method facilitated by module 79 is provided to enable gatherer 67 to obtain the goal information requested by a user. For example, the above mentioned example of WEB-site

- 19 -

apartments.com has a specific HTML (hyper-text-markup-language) logic that it uses to create its site and post its information. Such site logic is relatively standard fare for a majority of different sites hosted by different entities. Using this knowledge, a knowledge worker creates a site-specific script or template for gatherer 67 to follow. Such a template
5 contains descriptions and locations of the appropriate fields used, for example, at apartments.com. Apartment description, location, deposit information, rental information, agent contact information, and other related fields are matched in terms of location and label description on the template created with module 79. Completed templates are stored in a database contained in a storage facility such as, perhaps, repository 29 of Fig. 1. Such
10 templates may be reused and may be updated (edited) with new data.

In one embodiment, one script may contain site logics for a plurality of WEB pages, and instructions for specific navigational instruction and password or login information may be contained therein and executed serially, such as one site at a time. It is important to note that the knowledge worker or workers may perform much of their
15 scripting via automatic controls such as by object linking and embedding (OLE) and a minor portion of scripting may be performed manually in an appropriate computer language, many of which are known in the art).

Gatherer 67 also has a process layer 71 adapted for internal information gathering and parameter configuration. An optional portal server interface 81 is provided and
20 adapted to allow gather 67 to provide updated information to a user's list of hyperlinks and also to obtain data from portal server 31 if required. For example, required hyperlinks may be mirrored from a user's home page to a scripting template for navigational purposes. In an embodiment wherein gatherer 67 is part of a standalone service, a convention for providing user login information may be supplied at the client's end when a
25 request is made. For example, an encrypted password may be supplied by a client plug-in and gatherer 67 may temporarily borrow the user's encryption key when auto login is performed.

- 20 -

An appliance configuration module 83 is provided and adapted to allow a user to define and configure an Internet appliance to communicate with the service and receive summary information. Such appliances may include but are not limited to palm top PC's, lap top PC's, cellular telephones, WEB TV's, and so on. Typically, a user will be
5 presented a configuration WEB page from a network server that displays in his browser window on his desktop PC. The page contains an interface for communicating device parameters and communication protocol types to module 83. In this way, a user may configure a preferred device for receipt of summary information. Device parameters and communication protocols inherent to such a device are incorporated into the scripting of
10 the site template and are used as instructions for WEB summary delivery.

A navigation layer 73 is provided and adapted to perform the function of external site navigation and data gathering for gatherer 67. To this end, a communication interface/browser control module 85 is provided and adapted to function as a WEB browser to access WEB sites containing WEB data. Control 85 receives it's instruction
15 from the scripted template created by the knowledge worker.

A parsing engine 87 is provided and adapted to parse individual WEB sites according to a template created via scripting module 79. Parsing engine 87 may be a Pearl engine, an IE HTML engine, or any other or combination of known parsing engines. The template (not shown) tells control 85 and parsing engine 87 where to go and what fields at
20 the destination site to look for to access desired data. Once the data fields are located, parsing engine 87 gathers current data in the appropriate field, and returns that data to the service for further processing such as data conversion, compression and storage, and the like.

Because WEB sites use tools that use consistent logic in setting up their sites, this
25 logic may be used by the summarization service to instruct control 83 and parsing engine 87. The inventor provides herein an exemplary script logic for navigating to and garnishing data from amazon™.com. The hyperlinks and/or actual URLs required for navigation are not shown, but may be assumed to be included in the template script. In

- 21 -

this example, a company name Yodlee (known to the inventors) is used in the script for naming object holders and object containers, which are in this case Active X™ conventions. In another embodiment, Java™ script or another object linking control may be used. The scripted template logic example is as follows:

```
5  # Site amazon.orders.x - shows status of orders from Amazon

login( 7 );

get( "/exec/obidos/order-list/" );
10 my @tables = get_tables_containing_text( "Orders:" );

my $order_list = new Yodlee::ObjectHolder( 'orders' );
$order_list->source( 'amazon' );
15 $order_list->link_info( get_link_info() );

my @href_list;
my @container_list;

20 foreach my $table ( @tables ) {
    my @rows = get_table_rows();

    foreach my $i ( 0 .. $#rows ) {
        select_row( $i );
        25 my $text = get_text( $rows[ $i ] );
        next if $text =~ /Orders:|Status/;

        my @items = get_row_items();
        next unless @items >= 4;

        30 my( $order_num, $date, $status );
        select_cell( 1 );
        $order_num = get_cell_text();

        35 my $href = get_url_of_first_href( get_cell() );

        select_cell( 2 );
        $date = get_cell_text();
        select_cell( 3 );
        40 $status = get_cell_text();
```


- 22 -

```

next unless defined $order_num and defined $date and defined $status;

my $order = new Yodlee::Container( 'orders' );
5  $order->order_number( $order_num );
  $order->date( $date );
  $order->status( $status );

  $order_list->push_object( $order );
10
  if( defined $href ) {
    push( @href_list, $href );
    push( @container_list, $order );
  }
  foreach my $i ( 0 .. $#href_list ) {
15    get( $href_list[ $i ] );

    @tables = get_tables_containing_text( "Items Ordered:" );

20    foreach my $table ( @tables ) {
      my @rows = get_table_rows();

      foreach my $j ( 0 .. $#rows ) {
        select_row( $j );
25
        my $href = get_url_of_first_href( get_row() );

        next unless defined $href;

30        my @child_list = get_children( get_row(), 'a' );
        next unless defined $child_list[ 0 ];

        my $text = get_text( $child_list[ 0 ] );

35        $container_list[ $i ]->description( $text );
      }
    }
  }

40 result( $order_list );

```

- 23 -

The above example is a script that instructs control 85 and parser 87 to navigate to and obtain data from Amazon™.com, specifically that data that reflects the user's current order status. Scripts may also be written to obtain virtually any type of text information available from any site. For example, a user may wish to obtain the New York Times
5 headlines, the top ten performing stocks, a comparative list of flights from San Francisco to New York, etc. In one embodiment, metadata may be associated with and used in- place of the actual scripted language for the purpose of reducing complication in the case of many scripts on one template.

A data processing layer 75 is provided and adapted to store, process, and present
10 returned data to users according to enterprise rules and client direction. A database interface module 89 is provided and adapted to provide access for gatherer 67 to a mass repository such as repository 29 of Fig. 1, for the purpose of storing and retrieving summary data, templates, presentation directives, and so on. Gatherer agent 67 may also
15 access data through interface 89 such as profile information, user account and URL information, stored site logics and so on. Data scanned from the WEB is stored in a canonical format in a database such as repository 29, or in another connected storage facility. All stored data is, of course, associated with an individual who requested it, or for whom the data is made available according to enterprise discretion.

A summarization page module 91 is provided and adapted to organize and serve a
20 WEB summary page to a user. Module 91, in some embodiments, may immediately push a WEB summary to a user, or module 91 may store such summarized pages for a user to access via a pull method, in which case a notification may be sent to the user alerting him of the summary page availability. Summarization module 91 includes an HTML renderer that is able to format data into HTML format for WEB page display. In this way, e-mail
25 messages and the like may be presented as HTML text on a user's summarization page. Moreover, any summary data from any site may include an embedded hyperlink to that site. In this way, a user looking at an e-mail text in HTML may click on it and launch the

- 24 -

appropriate e-mail program. Other sites will, by default, be linked through the summary page.

Many users will access their summary data through a WEB page as described above, however, this is not required in order to practice the present invention. In some
5 embodiments, users will want their summary information formatted and delivered to one of a variety of Internet-capable appliances such as a palm top or, perhaps a cell phone. To this end, the renderer is capable of formatting and presenting the summary data into a number of formats specific to alternative devices. Examples of different known formats include, but are not limited to XML, plain text, VoxML, HDML, audio, video, and so on.

10 In a preferred embodiment of the present invention, gather 67 is flexible in such a way as it may act according to enterprise rules, client directives, or a combination of the two. For example, if a user makes a request for summary data about a user/subscribed WEB page to be periodically executed and presented in the form of a HTML document, then gather 67 would automatically access and analyze the required internal information
15 and user provided information to formulate a directive. Using scripting module 79, a knowledge worker provides a template (if one is not already created for that site) that contains the "where to go" and "what to get" information according to site logic, user input, and known information.

Alternatively, if a user requests a summary about data on one of his sites such as,
20 perhaps, current interest rates and re-finance costs at his mortgage site, the service may at it's own discretion provide an additional unsolicited summary from an alternate mortgage site for comparison. This type of summarization would be designed to enhance a user's position based on his profile information. In this case, updated data about latest interest rates, stock performances, car prices, airline ticket discounts, and so on would be stored
25 by the service for comparative purposes. If a user request for a summary can be equaled or bettered in terms of any advantage to the user, such summary data may be included.

In many cases, created templates may be re-used unless a WEB site changes it's site logic parameters, in which case, the new logic must be accessed and any existing

- 25 -

templates must be updated, or a new template may be created for the site. The templates contain site-specific script obtained from the site and stored by the knowledge workers. In one embodiment, companies hosting WEB pages automatically provide their site logics and any logic updates to the service by virtue of an agreement between the service and the
5 WEB hosts.

In an alternative embodiment gatherer 67 may be implemented as a client application installed on a user's PC. In this embodiment, a user would not be required to supply log-in or password codes. Summarization scripts may be sent to the client software and templates may be automatically created with the appropriate scripts using
10 log-in and password information encrypted and stored locally on the user's machine.

In addition to providing WEB summary information, gatherer 67 may also be used to provide such as automatic registration to new sites, and for updating old registration information to existing sites. For example, if a user wishes to subscribe, or register at a new site, only the identification of the site is required from the user as long as his pertinent
15 information has not changed. If a new password or the like is required, gatherer 67 through control module 73 may present login or password codes from a list of alternative codes provided by a user. In another embodiment, a database (not shown) containing a wealth of password options may be accessed by gatherer 67 for the purpose of trying different passwords until one is accepted by the site. Once a password or log-in code is
20 accepted, it may be sent to a user and stored in his password list and at the network level.

It will be apparent to one with skill in the art that a software application such as gatherer 67 may be implemented in many separate locations connected in a data network. For example, a plurality of gatherer applications may be distributed over many separate servers linked to one or more mass repositories. Client applications include but are not
25 limited to a WEB-browser plug-in for communicating to the service. Plug-in extensions may also be afforded to proxy servers so that auto-login and data access may still be performed transparent to a user.

- 26 -

In another embodiment, plug-ins enabling communication with gatherer 67 may be provided and configured to run on other network devices for the purpose of enabling such a device to initiate a request and get a response without the need for a desktop computer.

In most embodiments a user operating a desktop PC will order a one time or
5 periodic summary related to some or all of his subscribed WEB sites. A logical flow of an exemplary request/response interaction is provided below.

Fig. 5 is a logical flow chart illustrating an exemplary summarization process performed by the software agent of Fig. 4 operating in a user-defined mode. In step 93, a user has initiated a new request for a summary (summary order). It is assumed for the
10 purpose of discussion, that the request of step 93 involves a site wherein no template has been created. In step 95, the request is received and analyzed. A knowledge worker will likely perform this step. The new request may be posted to the user's portal home page, sent directly to gatherer 67, or even communicated through e-mail or other media to the service.

15 In step 97 a knowledge worker accesses particular site logic associated with the request URLs. For example, if the request involves a plurality of URLs, then all site logics for those URLs are accessed. Logic may be available in a repository such as repository 29 of Fig. 1 if they were obtained at the time of user registration to a particular URL, or sent in by WEB-site hosts shortly after registration. If it is a completely new URL, then the
20 logic must be obtained from the site. In most cases however, the logic will be known by virtue of a plurality of users accessing common URLs. Therefore cross-linking in a database of logic/user associations may be performed to access a logic for a site that is new to one particular user, but not new to another.

In step 99, the knowledge worker creates a template by virtue of scripting module
25 79 (Fig. 4) containing all site logic, URLs, log-in and password information, and the user request information. As described previously, templates may be re-used for a same request. In most cases, scripting may be mostly automated with minimum manual input performed by the knowledge worker. In many cases, an existing template will match a

- 27 -

new request exactly, and may be re-used. In that case steps 97, 99, and 101 would not be required.

In step 101 the template is stored and associated with the requesting user. The stored template may now be retrieved at a scheduled time for performing the summary gathering. At step 103, a browser control such as module 85 of Fig. 4 is activated to access the stored template and navigate to specified URLs for the purpose of gathering summary data. If a timing function is attributed to the template stored in step 101, then the template may self execute and call up the browser function. In another embodiment, the knowledge worker may notify the browser control to get the template for it's next task. In some embodiments, a plurality of controls may be used with one template as previously described.

In step 105, automatic log-in is performed, if required, to gain access to each specified URL. In step 107, a specified WEB-page is navigated to and parsed for requested data according to the logic on the template. If there are a plurality of WEB – pages to parse, then this step is repeated for the number of pages. A variety of parsing engines may be used for this process such as an IE™ parser, or a Pearl™ parser. Only the requested data is kept in step 107.

A request may be an on-demand request requiring immediate return, or a scheduled request wherein data may be posted. At step 109, such logic is confirmed. If the data is to be presented according to a periodic schedule, then summary data parsed in step 107 is stored for latter use in step 111. In step 113, the summary data is rendered as HTML if not already formatted, and displayed in the form of a summary WEB-page in step 115. The summary page may be posted for access by a user at a time convenient to the user (pull), or may be pushed as a WEB-page to the user and be made to automatically display on the user's PC. Notification of summary page availability may also be sent to a user to alert him of completion of order.

If the summary data is from a one-time on-demand request and required immediately by a user, then a network appliance and data delivery method (configured by

- 28 -

the user) is confirmed, and the data is rendered in the appropriate format for delivery and display in step 117. In step 119, the summary data is delivered according to protocol to a user's designated appliance. In step 121 a user receives requested information in the appropriate format.

5 It will be apparent to one with skill in the art that there may be more or fewer logical steps as well as added sub-steps than are illustrated in this example. For example, step 105 may in other embodiments include sub-steps such as getting an encryption key from a user. In still another embodiment, part of a request may be rendered as HTML as in step 113 while certain other portions of the same request data might be rendered in
10 another format and delivered via alternative methods. There are many possibilities.

The method and apparatus of the present invention may be used to present summaries to users without user input. Process logic such as this is detailed below.

Fig. 6 is a logical flow chart illustrating an exemplary summarization process performed by the software agent of Fig. 4 in a User-independent smart mode with
15 minimum or no user input. In step 117 an enterprise-initiated summary process begins. In this case, the enterprise may be assisting a user in finding a better deal or, perhaps presenting the individual with summaries from and links to alternative pages not yet subscribed to by a user.

In step 119, a database containing user information and parameters is accessed and
20 reviewed. Certain information specific to a user may be required to initiate an enterprise-sponsored summary report. At step 121, the knowledge worker accesses the site logic specific to the specified target site or sites for summarization. In step 123, the knowledge worker modifies an existing user template, or creates a new one if necessary. At step 125 the template is stored in a repository such as repository 29 and associated with the user.

25 As described in Fig. 5, the template either self-executes according to a timed function and invokes a browser control such as control 85 (Fig. 4), or is accessed by control 85 as a result of task notification. In step 127, the browser control begins navigation. Auto logins are performed, if required, in step 129 to gain access to selected

- 29 -

sites. If the WEB pages are new to a user, and the user has no registration with the WEB site, then through agreement, or other convention, the service may be provided access to such sites. Such an agreement may be made, for example, if the host of the WEB site realizes a possibility of gaining a new customer if the customer likes the summary
5 information presented. In many other situations, no password or login information is required to obtain general information that is not personal to a client.

In step 131, all sites are parsed for summary data and stored in canonical fashion in step 133. At step 135, the data is compiled and rendered as HTML for presentation on a summary page. In step 137, a WEB summary containing all of the data is made available
10 to a user and the user is notified of it's existence.

Providing certain information not requested by a user may aid in enhancing a user's organization of is current business on the WEB. Moreover, unsolicited WEB summaries may provide better opportunities than the current options in the user's profile. Of course, assisting a user in this manner will require that the enterprise (service) have
15 access to the user's profile and existing account and service information with various WEB sites on the user's list. A user may forbid use of a user's personal information, in which case, no enterprise-initiated summaries would be performed unless they are conducted strictly in an offer mode instead of a comparative mode.

The method and apparatus also may be practiced in a language and platform
20 independent manner, and be implemented over a variety of scalable server architectures.

The method and apparatus of the present invention may be practiced via private individuals on the Internet, businesses operating on a WAN connected to the Internet, businesses operating via private WAN, and so on. There are many customizable situations.

25 The present invention as taught herein and above should be afforded the broadest of scope. The spirit and scope of the present invention is limited only by the claims that follow.

- 30 -

What is claimed is:

1. An Internet Portal, comprising:
 - an Internet-connected server; and
 - 5 a portal software executing on the server, including a summary software agent;
wherein the Portal maintains a list of Internet destinations specific for a subscriber,
and the summary software agent accesses the Internet destinations, retrieves information
according to pre-programmed criteria, and summarizes the retrieved information for
delivery to the subscriber.
- 10 2. The Portal of claim 1 further comprising a configuration and initiation interface for a
subscriber to set up and start a summary search.
3. The Portal of claim 1 wherein the summary searches are configured for individual
15 clients as templates stored and retrieved at the Internet-connected server.
4. The Portal of claim 1 wherein information retrieved in a summary search is stored to be
retrieved by the subscriber.
- 20 5. The Portal of claim 1 wherein information retrieved in a summary search is
downloaded immediately to the subscriber.
6. The Portal of claim 1 wherein autologins are performed for the subscriber at each
Internet site according to a data stored for the subscriber at the Portal.

25

- 31 -

7. In an Internet Portal system, a method for providing summaries of information at WEB sites, URLs for which are maintained for individual subscribers, the method comprising steps of:

(a) configuring a summary software agent executable on the Portal to access the
5 URLs;

(b) retrieving information from individual ones of the WEB sites accessed according to pre-programmed criteria specific to each subscriber; and

(c) providing the information to the subscriber.

10

8. The method of claim 7 further comprising a step for the subscriber to configure and initiate, via a configuration and initiation interface, a summary search.

9. The method of claim 7 wherein the summary searches are configured for individual
15 clients as templates stored and retrieved at the Internet-connected server.

10. The method of claim 7 wherein information retrieved in a summary search is stored to be retrieved by the subscriber.

20 11. The method of claim 7 wherein information retrieved in a summary search is downloaded immediately to the subscriber.

12. The method of claim 7 wherein autologins are performed for the subscriber at each Internet site according to a data stored for the subscriber at the Portal.

25

1/6

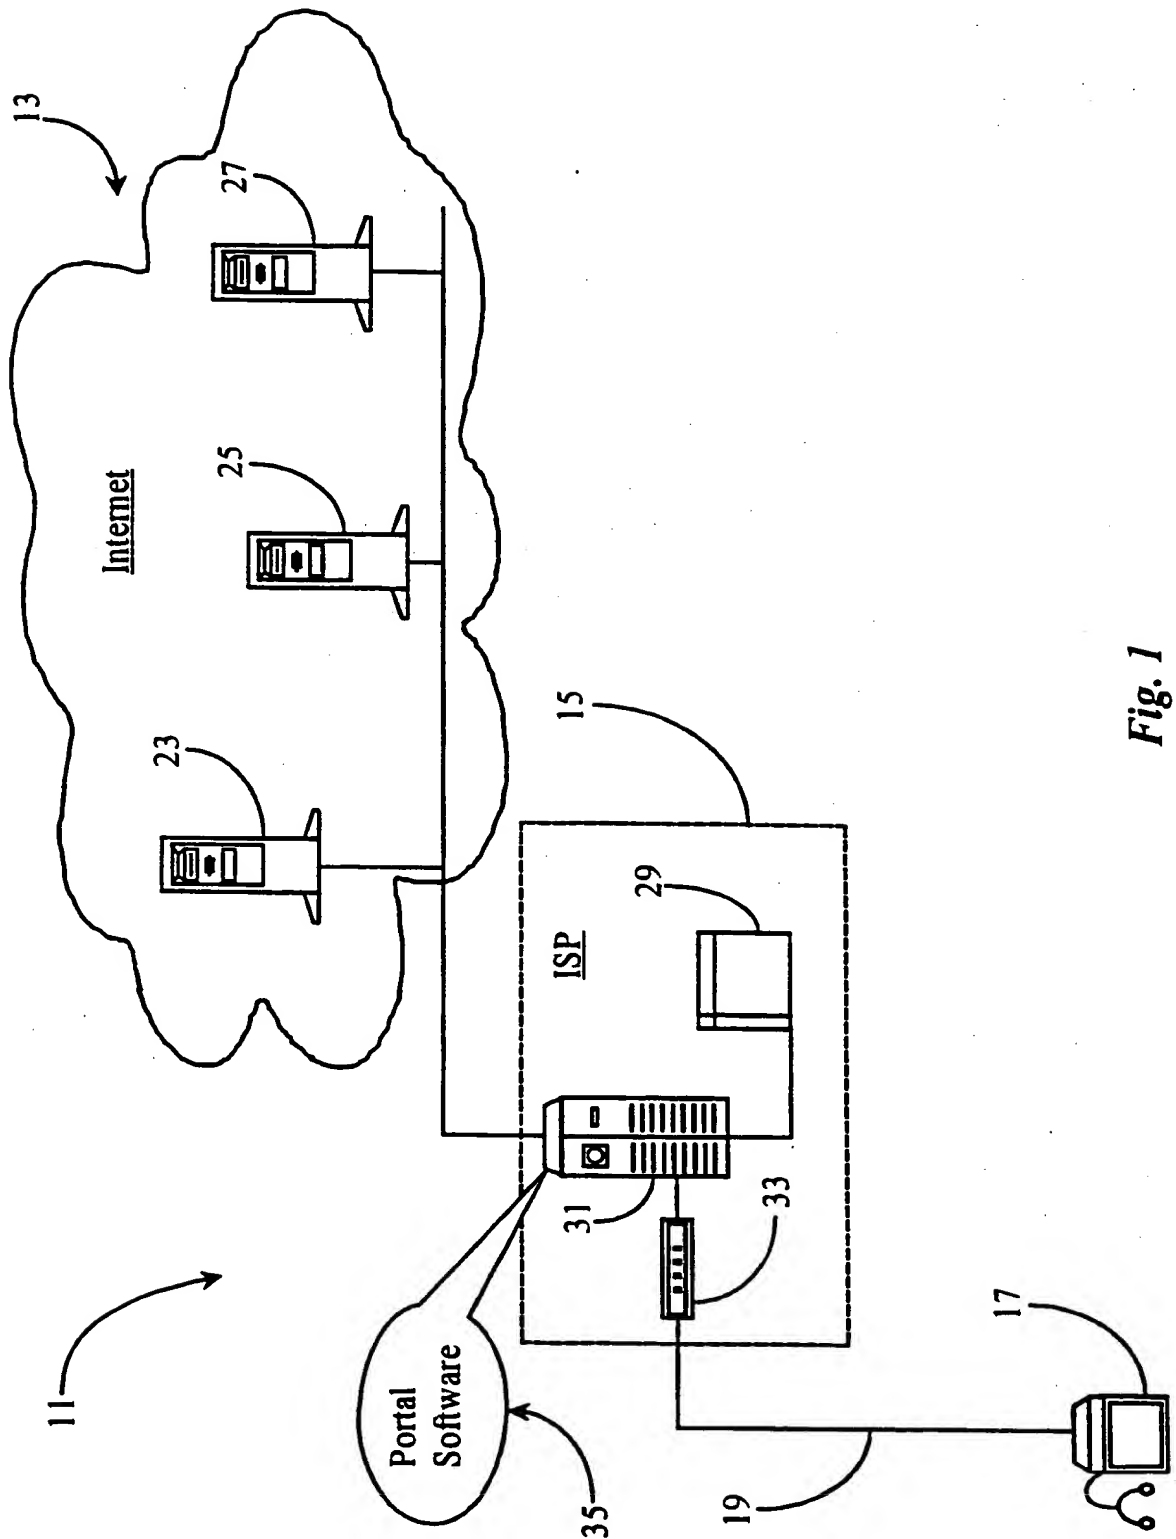


Fig. 1

2/6


The diagram illustrates a web browser window with a title bar, address bar, and content area. The content area displays a personalized page titled "Internet Portal.com (personalized page)". Below the title is a table with five columns: "Search", "Agent", "Last", "Update", and "ADD". The table contains five rows of user account information. Below the table is a search bar with a "Search String" input field and a "Search" button.

Search	Agent	Last	Update	ADD
Server Name	John Doe	John R. Doe	John R. Doe	Jane L. Doe
LBC.com	John R. Doe	John R. Doe	Jane L. Doe	John/Jane Doe
My Bank.com	John R. Doe	John R. Doe	Jane L. Doe	John/Jane Doe
My Stocks.com	John R. Doe	John R. Doe	Jane L. Doe	John/Jane Doe
My Shopping.com	John R. Doe	John R. Doe	Jane L. Doe	John/Jane Doe
Mortgage.Com	John R. Doe	John R. Doe	Jane L. Doe	John/Jane Doe
Airline.com	John R. Doe	John R. Doe	Jane L. Doe	John/Jane Doe

Search String Search

Fig. 2

3/6

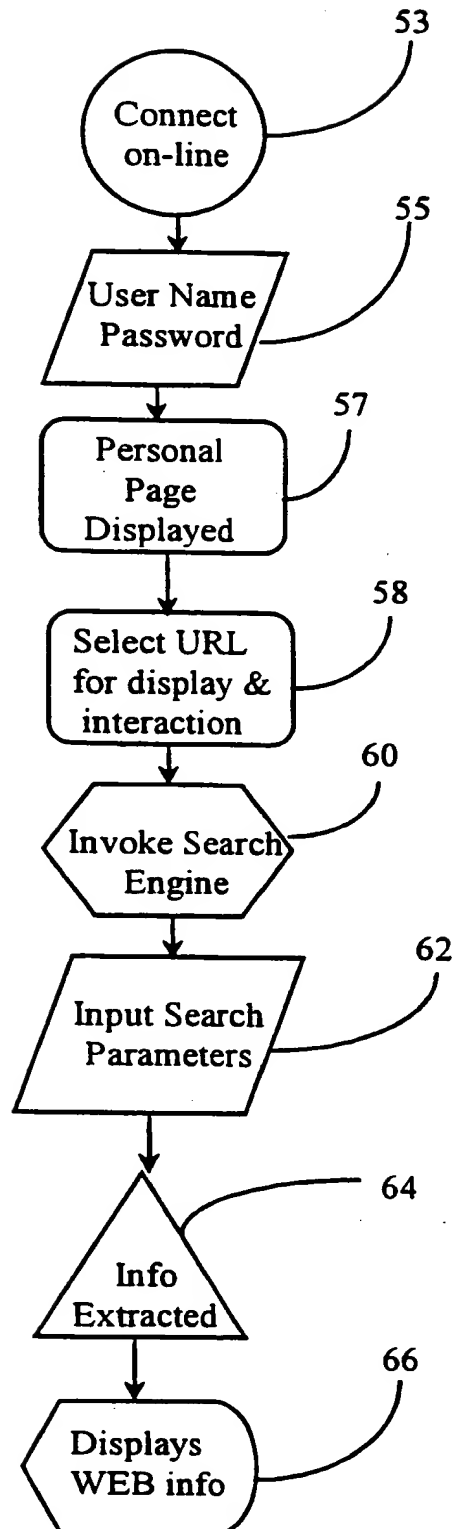**Fig. 3**

4/6

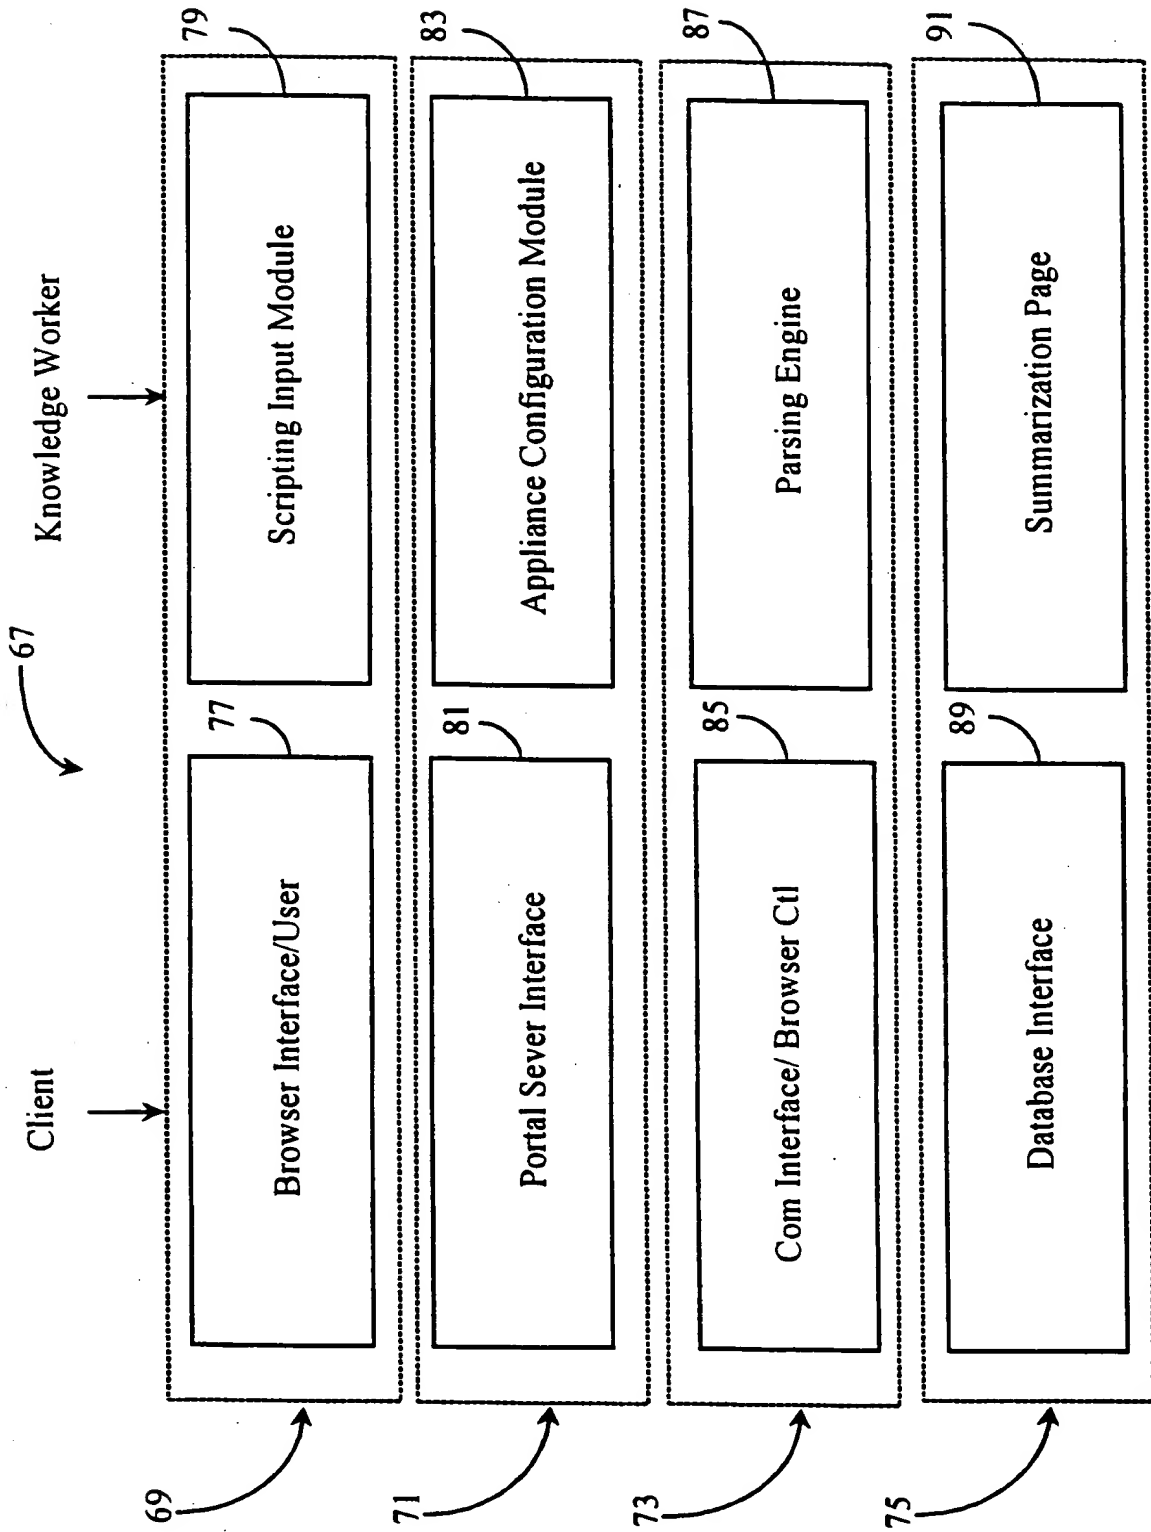


Fig. 4

5/6

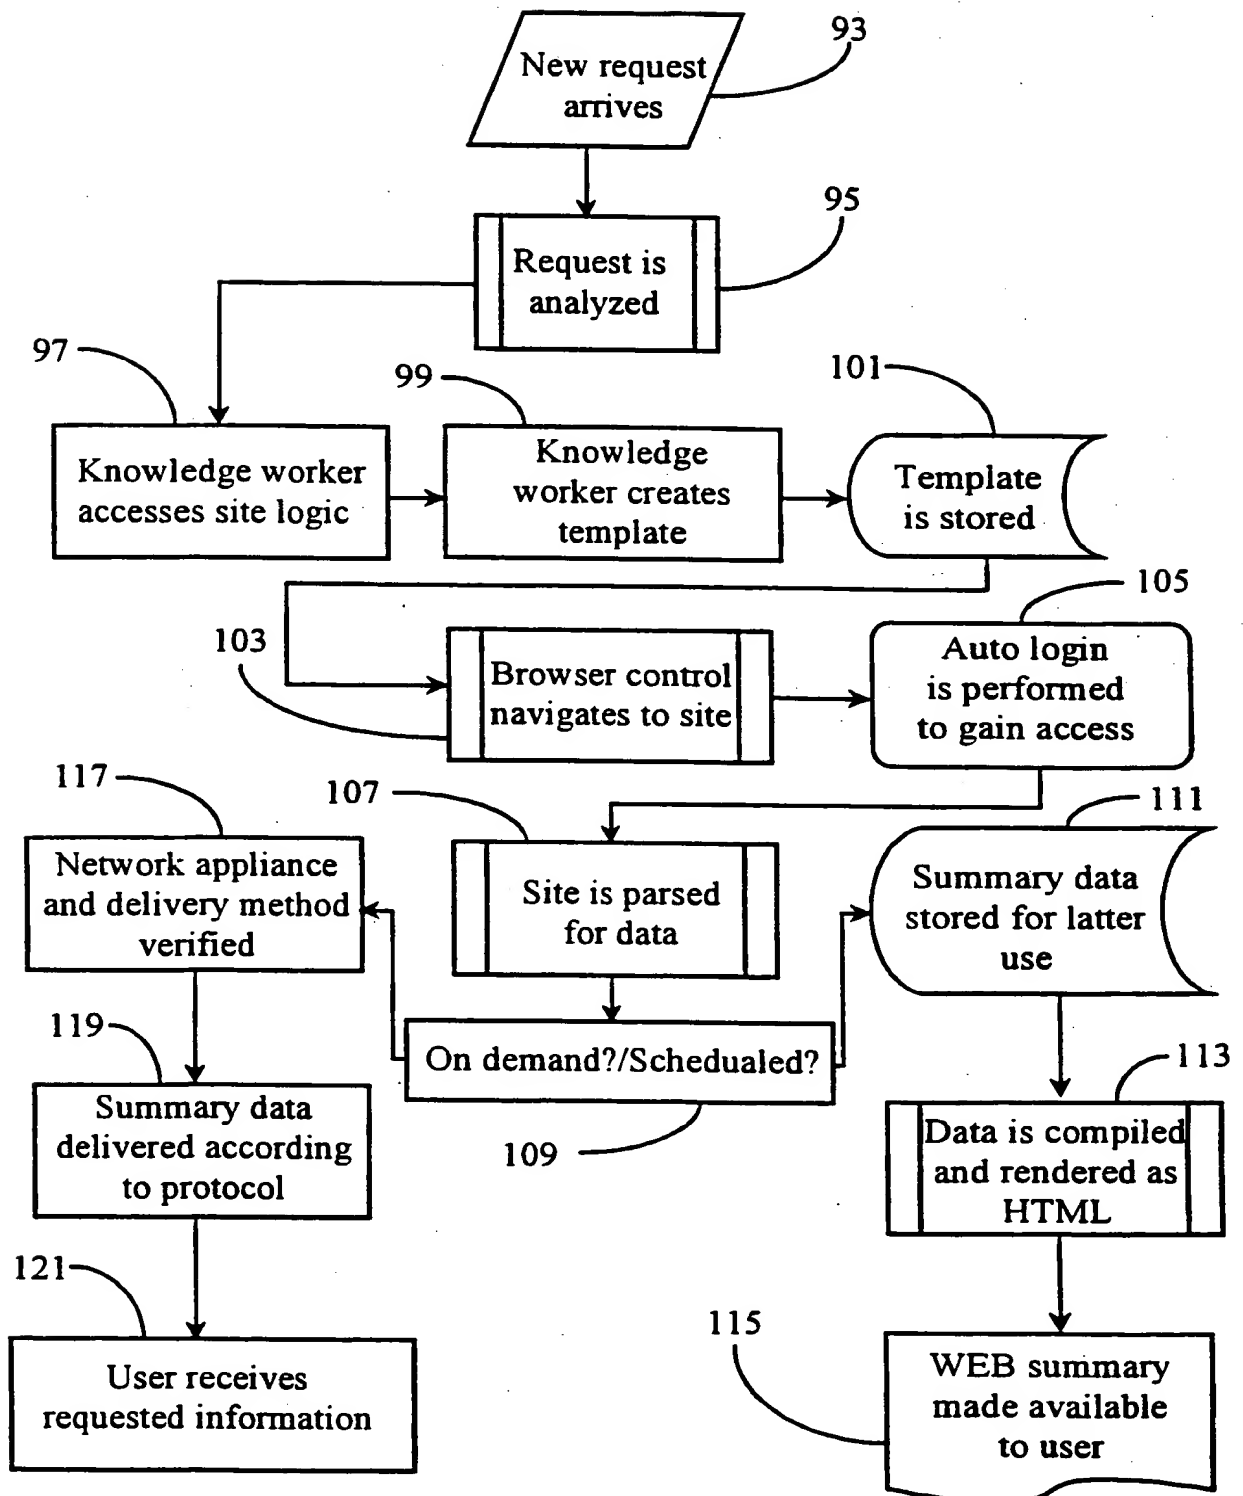
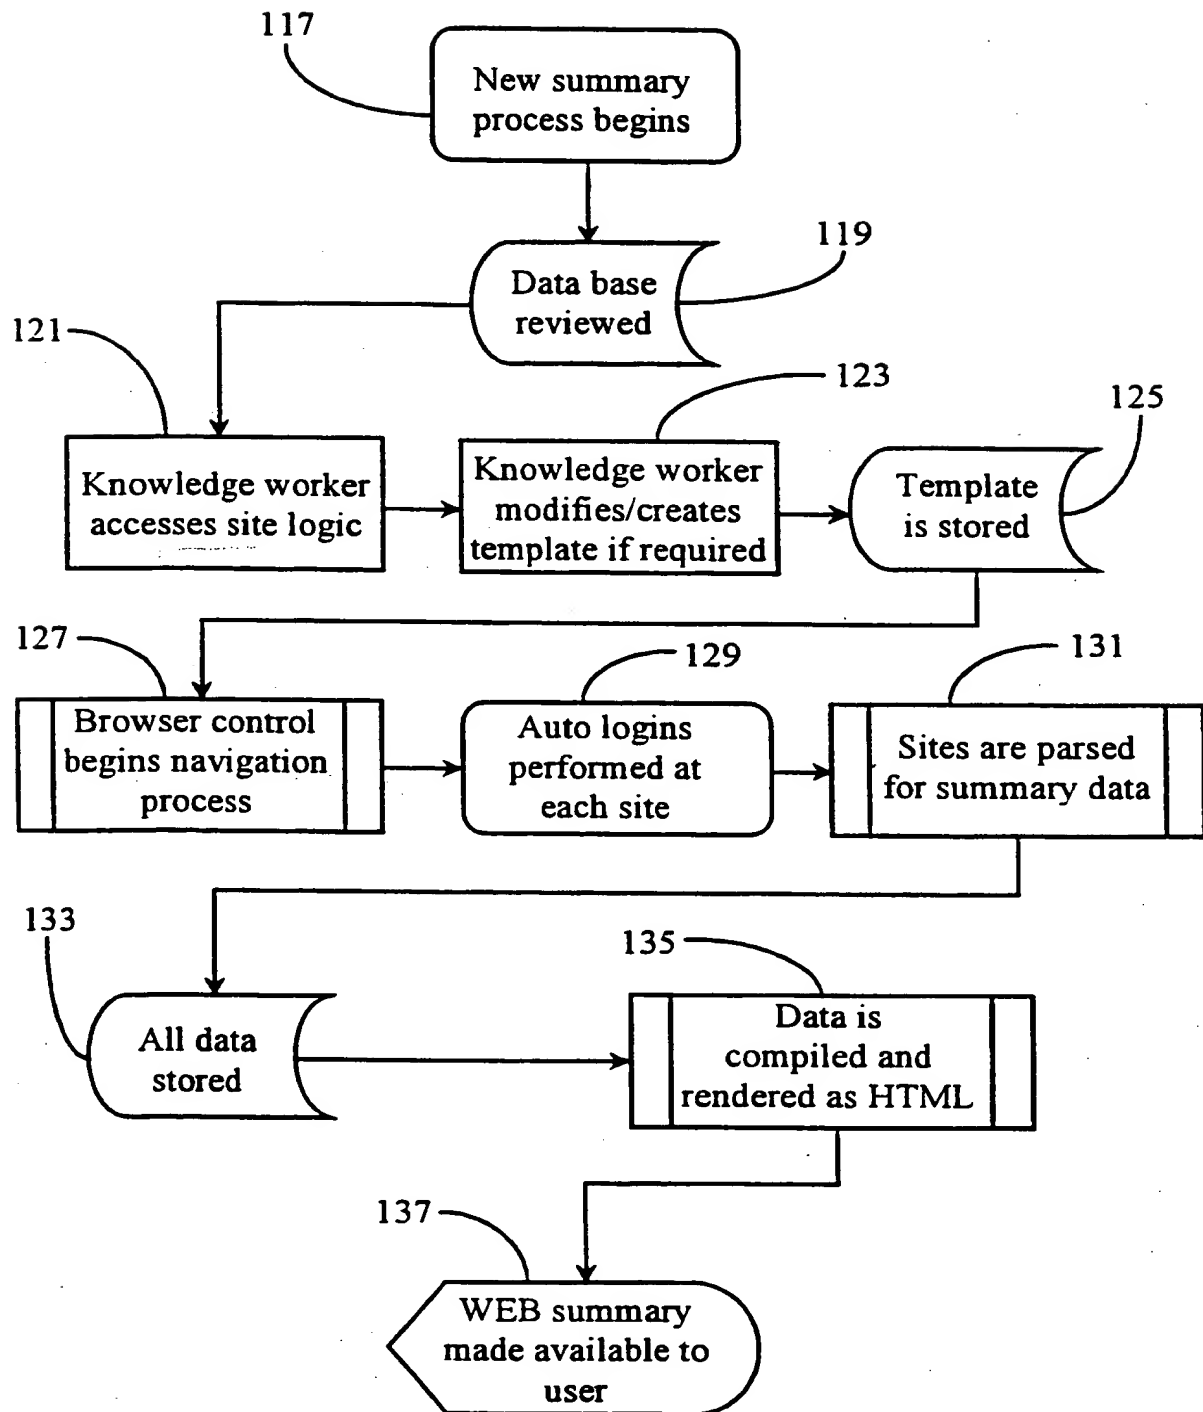


Fig. 5

6/6

**Fig. 6**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/10411

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 17/00, 17/27

US CL : 707/501, 513

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 707/501, 513

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 6,032,162 A (BURKE), 29 February 2000 (29.02.2000), abstract, Figures 2-4.	1-12
Y,P	US 6,029,182 A (NEHAB et al.) 22 February 2000 (22.02.2000), abstract, Figures 5, 7, and 10, columns 7-10, five paragraphs beginning at column 12, line 66.	1-12
A,P	US 6,029,180 A (MURATA et al.) 22 February 2000 (22.02.2000), abstract, Figures, 5-6 and 8.	1-12
A,P	US 5,987,466 A (GREER et al.) 16 November 1999 (16.11.1999), abstract, Figures 3-4.	1-12
Y,P	US 5,983,227 A (NAZEM et al.) 09 November 1999 (09.11.1999), abstract, Figures 1, 2, and 5.	1-12
A,P	US 5,931,907 A (DAVIES et al.) 03 August 1999 (03.08.1999), abstract, Figure 1-3.	1-12
A	US 5,855,015 A (SHOHAM) 29 December 1998 (29.12.1998), abstract, Figure 1.	1-12
A	US 5,794,233 A (RUBINSTEIN) 11 August 1998 (11.08.1998), abstract, Figure 1.	1-12
A	US 5,708,825 A (SOTOMAYOR) 13 January 1998 (13.01.1998), abstract, Figure 8.	1-12
Y	US 5,649,186 A (FERGUSON) 15 July 1997 (15.07.1997), abstract, Figures 1, 2D, 3-5.	1-12

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"R" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 July 2000 (14.07.2000)

Date of mailing of the international search report

11 AUG 2000

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Michael Razavi

James R. Matthews

Telephone No. (703) 305-3900